



OPTIONS



VERSIONS

Type	Current per Winding A	Holding Torque Ncm	Resistance per Winding Ohm	Inductance per Winding mH	Rotor Inertia gcm ²	Weight kg	Length „A“ mm
ST2818S1006	0.67	6.08	2.8	1	9	0.11	31.5
ST2818M1006	0.67	10.61	3.4	1.2	12	0.176	44.5
ST2818L1006	0.67	12.73	4.6	1.8	18	0.25	50.5
ST2818L1404	1.4	11.7	2.3	1.8	18	0.25	50.5

The current and holding torque values refer to bipolar serial wiring. The resistance and inductance values refer to unipolar wiring.


ORDER IDENTIFIER

ST2818S1006-
A = single shaft end
B = double shaft end

ACCESSORIES

ZK-JST-VL-4 Extension Cable 2m
ZK-JST-VL-6 Extension Cable 2m
ZD-D28 Damper

DIMENSIONS (IN MM)

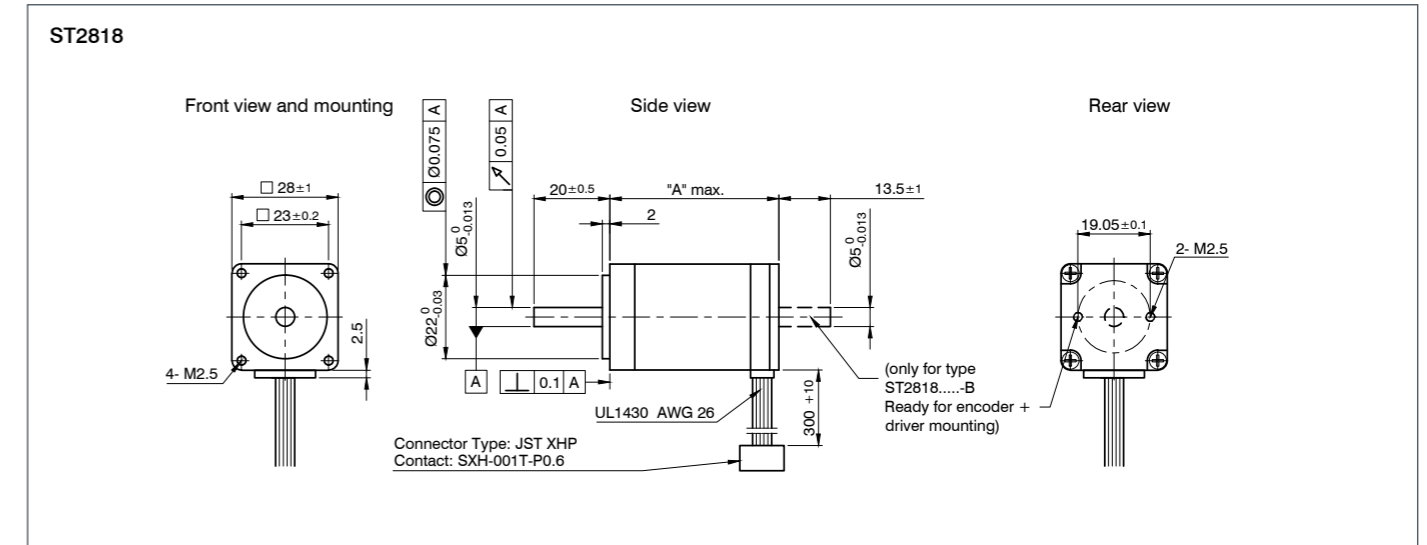

TORQUE CURVES

