



Servomotor MP4835

Servomotor MP4835

0.16Nm

Data sheet -----

Motor CEI and IEC standards – permanent magnet – 2 poles – low loss magnetic lamination


Speed/torque/current linear characteristics – excellent dynamic response

Wide range speed regulation at constant torque – enclosed no ventilated IC410


Ambient temperature max.+40°C – F/H class insulation – IP54 protection



TYPE	Symbols	Units	MP4835	
Winding code	---	---	K06	K08
Continuous stall torque	Cn	Nm	0.16	0.16
Continuous stall current	In	A	3.2	2.4
Peak stall torque	Cp	Nm	0.6	0.6
Peak current	Ip	A	12	9
Torque constant	Kt	Nm/A	0.05	0.067
Befm rated speed	E	V	21	21
Voltage constant	Ke	Vs/rad	0.05	0.067
Rated speed	n	min ⁻¹	4000	3000
Armature resistance	Ra	ohm	1.3	1.8
Terminals resistance	Rm	ohm	1.9	2.4
Armature inductance	La	mH	1.2	1.7
Electrical time constant	Te	ms	0.92	0.95
Moment of inertia	J	Kgcm ²	0.18	0.18
Max. speed	n max	min ⁻¹	6000	6000
Max. voltage	V max	V	36	48
Weight	---	Kg	0.85	0.85

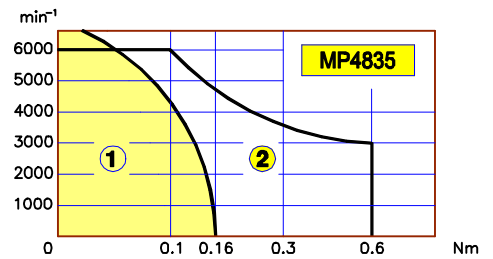

① CONTINUOUS DUTY
② INTERMITTENT DUTY



type MP4835
Radial load at 1000min⁻¹: 50N
Axial load : 1/10 Radial load

Torque at 2000min ⁻¹	Duty S1	C2	Nm	0.14	0.14
Power at 2000min ⁻¹	Duty S1	P2	W	29	29
Current at 2000min ⁻¹	Duty S1	I2	A	2.8	2.1
Torque at 3000min ⁻¹	Duty S1	C3	Nm	0.12	0.12
Power at 3000min ⁻¹	Duty S1	P3	W	38	38
Current at 3000min ⁻¹	Duty S1	I3	A	2.4	1.8
Torque at 4000min ⁻¹	Duty S1	C4	Nm	0.1	0.1
Power at 4000min ⁻¹	Duty S1	P4	W	42	42
Current at 4000min ⁻¹	Duty S1	I4	A	2	1.5

notes

Form factor 1

Tolerance ±10%

