Servomotor MP77

Servomotor MP77

2.8-8Nm

Data sheet -----

Degree of protection IP54 – flange mounting – N class dynamic balancing

Enclosed no ventilated – all mounting position

Ambient temperature max.+40°C – F and H class insulation for tropical climates



MP77__A__FDS

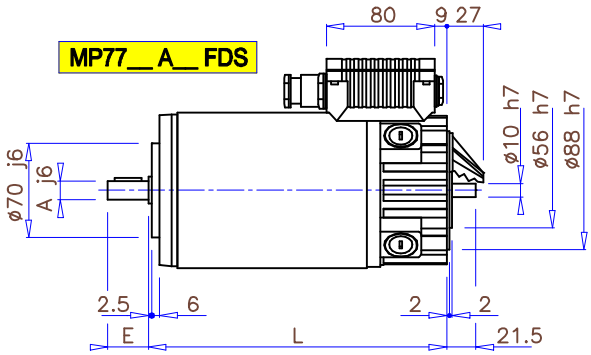



flange B14				
F	N	M	T	S
105	70	85	3	M6
120	80	100	3	M6

MP77__A__F__B14

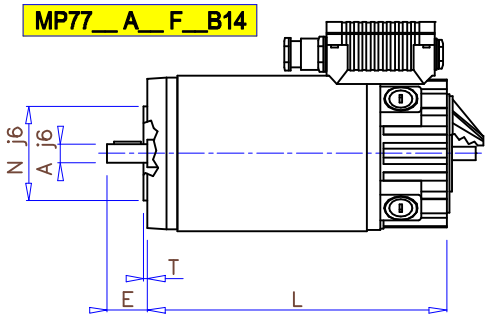



flange B5					
F	FQ	N	M	T	S
– –	120x120	110	100	3	9.5
200	150x150	130	115	3	11.5

type	L
MP77S	192
MP77M	222
MP77L	252
MP77XL	307

MP77__A__F__B5

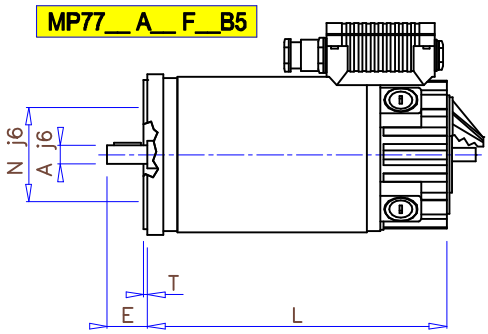



shafts				
A	E	P	H	d
14	30	5x5x20	16	M5x12
19	40	6x6x30	21.5	M6x18

MP77__A__B3

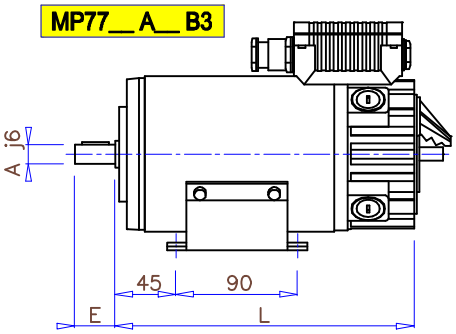







type MP77
Radial load at 1000min-1: 490N
Axial load : 1/10 Radial load